



SKYLIGHT SERIES

ARCHITECTURAL RECESSED LED SKYLIGHT

BRING NATURAL ILLUMINATION INDOORS.
ENGINEERED FOR ARCHITECTURAL SPACES.



NATURAL
ILLUMINATION



MOTORIZED
FLIP 0-90°



HIGH
CRI 95+



DUAL CCT
3200K-5600K



SILENT
COOLING



DMX512
CONTROL



LIGHTS

LumOptic **SKYLIGHT**

**DESIGNED TO DISAPPEAR.
BUILT TO PERFORM.**



The LumOptic Skylight Series delivers the clean appearance of a recessed architectural skylight with the flexibility of professional LED technology.

Designed for boardrooms, conference centers, executive offices, hospitality spaces, and premium commercial environments, Skylight combines exceptional color accuracy, silent operation, and motorized aiming into one elegant fixture.

- A MOTORIZED 0-90° FLIP SYSTEM**
Dynamic light direction for any need
- B HIGH CRI 95+ OUTPUT**
True color rendering for optimal clarity
- C DUAL CCT 3200K-5600K**
Tunable from warm to daylight
- D SILENT NATURAL CONVECTION COOLING**
Fanless design for quiet performance
- E DMX512 CONTROL**
Seamless integration with lighting systems
- F 0-100% FLICKER-FREE DIMMING**
Smooth, linear dimming performance

PERFECT FOR



CONFERENCE
ROOMS



EXECUTIVE
OFFICES



BOARDROOMS



BROADCAST
STUDIOS



HOSPITALITY



MUSEUMS &
GALLERIES



EXPERIENCE
CENTERS

📍 2001 E RANDOL MILL RD, SUITE 115, ARLINGTON, TX 76011-8219

✉️ INFO@LUMOPTIC.COM

📞 469-989-3074





LIGHTS

BUILT FOR CLEAN **INTEGRATION** ENGINEERED FOR **PERFORMANCE**

FLUSH RECESSED DESIGN

Architectural appearance with minimal ceiling intrusion for a seamless look.

MOTORIZED LIGHT DIRECTION


0-90° motorized flip allows dynamic lighting adjustment to suit any environment.

PROFESSIONAL CONTROL

Supports DMX512, Master Mode, XLR In/Out and Power/Signal loop through for easy integration.

SILENT COOLING

Natural convection eliminates noisy fans while maintaining reliable thermal performance.

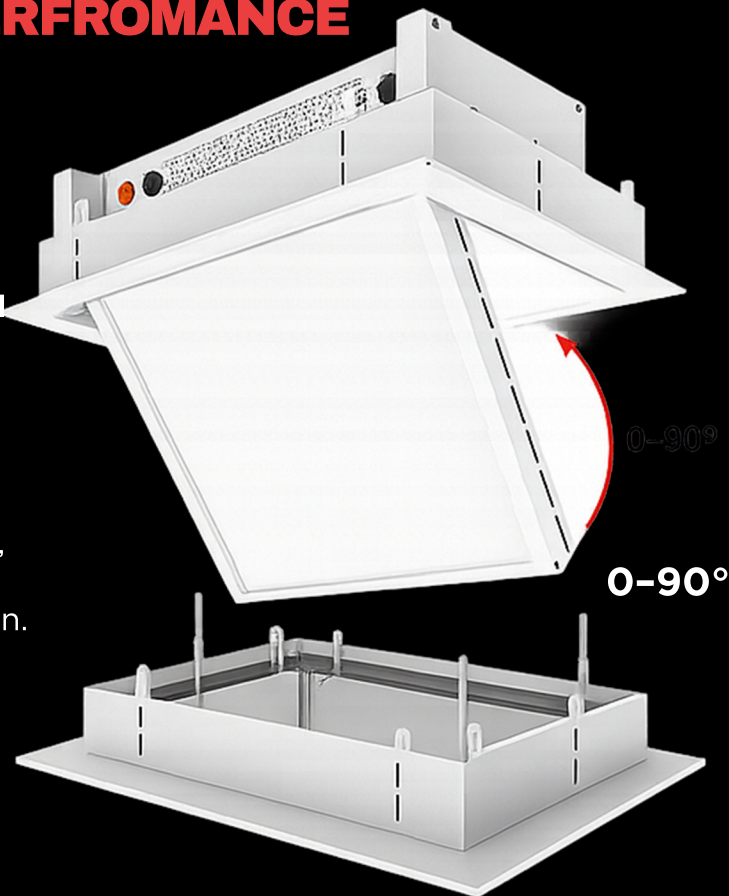


REAL WORLD **APPLICATIONS**




SPECIFICATIONS

Model	LED-HD600
Power	300W
Voltage	AC 110~240V 50/60Hz
LEDs	1080pcs high-brightness
CCT	3200K~5600K
CRI	≥95
Flip-down Angle	0°~90° (motorized flip)
Channels	Single CCT 2 Channel; Dual CCT 4 Channel
Cooling	Natural convection + Smart thermal
Dimming	0~100% linear
Lifespan	≥50,000 hours
Installation	Recessed
Connector	3-pin XLR In/Out
Protocol	DMX512
Control	Master + DMX
Connection	Power/Signal In/Out
Housing	Steel + Aluminum alloy
Shape	Square
Dimensions	23.46 x 23.46 x 5.51 in
Weight	12.95 kg (28.55 lbs)
Cut-out	22.05 x 20.08 in
Lighting Area	15.63 x 17.60 in
Application	Conference rooms, offices, boardrooms, hospitality, retail, studios, museums

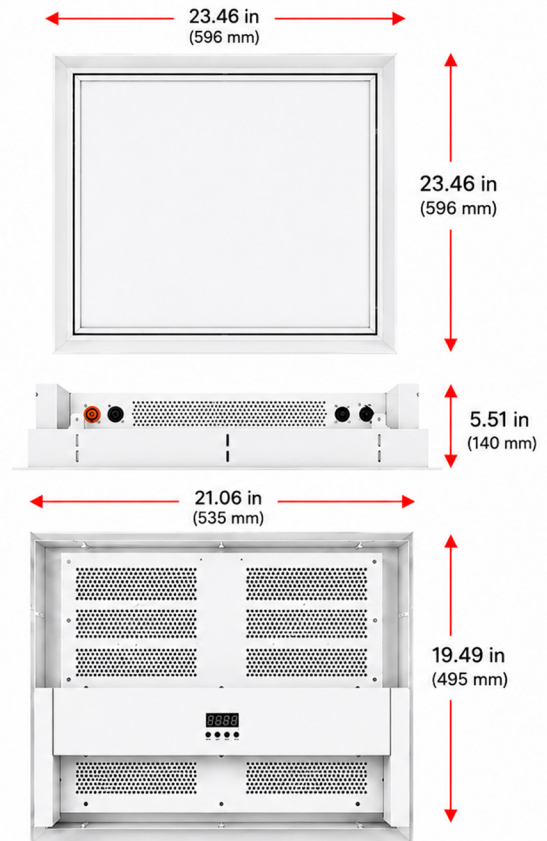

CONNECTIONS

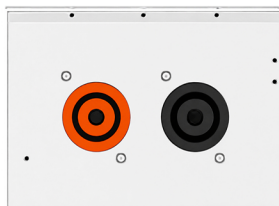


POWER IN/OUT



DMX IN/OUT
(3-PIN XLR)



CONTROL DISPLAY
& BUTTONS

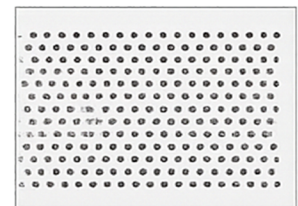

NATURAL CONVECTION
VENTS